588 U.S. PTO

oiease	type	a plus	sign	(+)	inside	this box	→	Г
	76			٠,,				

PTO/SB/05 (8-96)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

NEW UTILITY PATENT APPLICATION TRANSMITTAL

(to be used for new applications only)

to respect to a conocaon of informati	Trumbas ii displays a valid OMB control number.
Attorney Docket Number	
First Named Inventor	GREGORY E. JOHNSTON
Total Pages in this Submission	54-

APPLICATION ELEMENTS Notice: Checidist items mentioned under Application Elements section construct a new utility patent application. Please refer to MPEP Sections 506, 601, (37CFR 1.77, 1.53, 35 USC 111, 112, 113) for detailed explanation regarding completeness of an original patent application.				ACCOMPANYING APPLICATION PARTS			
1. Fee T	ransmittal Form (pr	escribed filing fee(s))	6. Assignment Papers			
2. Specification				7 T C4	artified Copy of P	riority Document(s)	
Title o	of the invention				foreign priority is		
	References to Rel dicable)	ated Applications		8 Cc	omputer Progran	n in Microfiche	
	nent Regarding Fe arch/Development			9. Er	nglish Translation	n Document <i>(if applicat</i>	ole)
	ence to Microfiche . Nicable)	Appendix		10 IV I	formation Disclo atement/PTO-14		IDS
Backs	pround of the Inven	tion		11. Pe	etition Checklist a	and Accompanying Petit	ion
Brief	Brief Summary of the Invention			12. Preliminary Amendment			
Brief Description of the Drawings (if drawings filed)			13. Proprietary Information				
Detailed Description			14. Return Receipt Postcard				
Claim or Claims			15. X Si	mall Entity State	ment		
Abstract of the Disclosure				16. A	dditional Enclosu	ıres <i>(please identity b</i> e	low):
3. Drawing(s) (when necessary as prescribed by 35 USC 113)			by				
4. Executed Declaration							
5. Genetic Sequence Submission				SIGNATURE O	F APPLICANT	ATTORNEY, OR AG	ENT
(if applicable, all must be included)				Firm or		,	
Paper Copy				Individual name	GREGOR	1 E. JOHNSTON	
Computer Readable Copy Statement Verifying Identical Paper and				Signature	Sylvist		
Computer Readable Copy				Date 69 APR 98			
FOR OFFICIAL USE O				ISE ONLY			
Application Number			Class			Independent Claims	
Date of Receipt Application Type			GAU			Total Claims	
Filing Date		Foreign Filing License?			Drawing Sheets		
	Small Entity		Foreign	n Address?	-	Special Handling?	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

PTO/SB/17 (10-96)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

	Complete if Known		
	Application Number		
FEE TRANSMITTAL	Filing Date		
ILL MARORIIITAL	First Named Inventor GREGORY E. JOHNSTON		
	Group Art Unit		
	Examiner Name		
TOTAL AMOUNT OF PAYMENT $(\$)$ 450	Attorney Docket Number		

METHOD OF PAYMENT (check one)	FEE CALCULATION (continued)	
The Commissioner is hereby authorized to charge	3. ADDITIONAL FEES	
indicated fees and credit any over payments to:	Large Entity Small Entity Fee Fee Fee Fee	
Deposit Account	Fee Fee Fee Fee Code (\$) Fee Description	Fee Paid
Number	105 130 205 65 Surcharge - late filing fee or oath	
Account Deposit	127 50 227 25 Surcharge - late provisional filing fee or	
Name	cover sheet.	
Charge Any Additional Charge the Issue Fee Set in 37 Fee Required Under 37 CFR 1.18 at the Mailing of the	139 130 139 130 Non-English specification	
CFR 1 16 and 1 17 Notice of Allowance, 37 CFR	147 2,460 147 2,460 For filling a request for reexamination	
1.311(b)	112 900° 112 900° Requesting publication of SIR prior to	
2. Payment Enclosed:	Examiner action	ŀ
Check Money Other	113 1,790 113 1,790 Requesting publication of SIR after	
	Examiner action	İ
FEE CALCULATION (fees effective 10/01/96)	115 110 215 55 Extension for response within first month	
1. FILING FEE	116 390 216 195 Extension for response within second month	
Laws Frakh. Consti Frakh.	117 930 217 465 Extension for response within third month	
Large Entity Small Entity Fee Fee Fee Fee Description Fee Paid	118 1,470 218 735 Extension for response within fourth month	
Code (\$) Code (\$)	119 300 219 150 Notice of Appeal	
101 770 201 385 Utility filing fee 395 106 320 206 160 Design filing fee	120 300 220 150 Filing a brief in support of an appeal	
	121 260 221 130 Request for oral hearing	
107 530 207 265 Plant filling fee	138 1,470 138 1,470 Petition to institute a public use proceeding	
108 770 208 385 Reissue filing fee	140 110 240 55 Petition to revive unavoidably abandoned	
114 150 214 75 Provisional filing fee	application	
SUBTOTAL (1) (\$) 395	141 1,290 241 645 Petition to revive unintentionally abandoned application	
2. CLAIMS Fee from Fee Paid	,,	
Total Claims 25 -20 = 5 X 11 = 55	143 440 243 220 Design issue fee 144 650 244 325 Plant issue fee	
independent 2 -3 = d v - d	122 130 122 130 Petitions to the Commissioner	
Claims Multiple Dependent Claims Ø X = Ø	123 50 123 50 Petitions related to provisional applications	
	126 230 126 230 Submission of information Disclosure Stmt	
Large Entity Small Entity		
Fee Fee Fee Fee Description Code (\$) Code (\$)	581 40 581 40 Recording each patent assignment per property (times number of properties)	
Code (\$) Code (\$) 103 22 203 11 Claums in excess of 20	146 770 246 385 Filling a submission after final rejection	
102 80 202 40 independent claims in excess of 3	(37 CFR 1.129(a))	
104 260 204 130 Multiple dependent claim	149 770 249 385 For each additional invention to be	
109 80 209 40 Reissue independent claims	examined (37 CFR 1.129(b))	
over original patent	Other fee (specify)	
110 22 210 11 Heissue claims in excess of 20 and over original patent	Other fee (specify)	
SUBTOTAL (2) (\$) 55	SUBTOTAL (3) (\$)	0
	Reduced by Basic Filing Fee Paid	

SUBMITTED BY	Υ			Complete (if	applicable)
Typed or Printed Name	GREGORY E. JOHNSTON			Reg. Number	
Signature	Bestuste	Date	OGAPR98	Deposit Account User ID	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington DC 20231.

TITLE:

An apparatus and process for capturing images by mobile security guards.

U.S. Patent Application of:

Gregory E. Johnston
Arie Levinkron

Express Mail" mailing	label number <u>EM</u>	381366550US
Date of Deposit:	ta Apro 8	_

I hereby certify that this correspondence, including the attachments listed on the accompanying New Utility Patent Application Transmittal, is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

(Typed or printed name of person mailing paper or fee)

(Signature of person mailing paper or fee)

An apparatus and process for capturing images by mobile security guards.

Background of the Invention

This invention relates generally to the field of surveillance camera systems, and more particularly to an apparatus and process for capturing images by mobile security guards.

Pan and tilt mechanisms for pointing cameras are old as dirt. From the introduction of the wheel, applying a pan and tilt camera system to moving vehicles has been limited. The operation of moving vehicles has evolved and now the opportunity for the addition of augmented vision can be utilized by the vehicle operator for various applications like mobile patrol guard image acquisition or improved driver safety. This technology started in August of 1977 with the incorporation of a cathod-ray tube and video camera on a tripod between the seats of an automobile. Tests were conducted and video tapes

were produced through 1980. The project was rekindled in 1996 by using a traditional closed circuit tv (CCTV) hard-mounted to a roof-rack and facing forward with a 10" TV monitor inside the cab for camera display. From this configuration and testing, the present invention was developed.

The following patents show prior attempts at various camera and control systems but none show the inventive combination described in our invention.

US005,671,932 'Camera Crane' - Crane mounted camera for motion picture and television industry. Not applicable to mobile environment nor for patrol guard image capture.

US005,526,041 'Rail-Based CCTV Surveillance System with Automatic Target Acquisition' - Similar to track-lighting systems with controlled and pre-set actions with target tracking. Not applicable to mobile environment nor for patrol guard image capture.

US005,448,290 'Video Security System with Motion Sensor Override, Wireless Interconnection, and Mobile Cameras' - Remote control of several cameras from monitor that is normal television. Not applicable to mobile environment nor patrol guard image capture.

US005,408,330 'Video Incident Capture System' - Camera and recorder mounted inside police car with wireless microphone. Indexing recording tape such that video will

not be over-written and includes tamper proofing scheme. Not applicable to vehicle exterior camera mounting and said recording means is tape where this invention digitizes each camera frame and stores in computer based media or transmits said digital image to a web-based data server.

US005,225,863 'Remotely Operated CameraSystem with Battery Recharging System' - Remotely operated camera mounted on suspension cable. Cable drive system charges camera battery from generator attached to wheels. Not applicable to mobile vehicle environment nor for patrol guard image capture.

US005,224,675A 'Mounting Apparatus' - Invention is for large rectangular camera systems at stationary sites. Pan and Tilt mechanism is worm gear construction.

Flexible adjustment of worm gear mechanical settings. Not applicable to mobile vehicle environment nor for patrol guard image capture.

US005,079,634 'Apparatus for Wireless-Controlling a Camera and Apparatus for Two-Direction Simultaneous Control of Electrically-Driven Equipment' - Apparatus for wireless-controlling of a camera and two-directional control protocol. Not applicable to mobile vehicle environment nor for patrol guard image capture.

US005,012,335 'Observation and Recording System for a Police Vehicle' - Video Cam-corder mounted to dash board of Police car. Automatic positioning of FOV from cooperative transmitter/receiver and includes audio from inside car or on the body of officer outside the car. Power supply variation from self contained battery to an

electrical supply from car. 'Handy cam-corder' mounted inside vehicle does not enable best field of regard (FOR) nor is it ruggedized for external vehicle mounting above the roof and outboard the vehicle's side.

US004,937,675 'Remote Viewing Apparatus' - Remotely operable optical viewing apparatus with pan and tilt mechanisms with extreme position slip clutch. Not applicable to mobile vehicle environment nor for patrol guard image capture. Our invention includes a novel slip clutch.

US004,910,591 'Side and rear viewing apparatus for motor vehicles' - Camera behind exterior mirrors with CRT(s) mounted in interior. Not applicable to mobile vehicle environment nor for patrol guard image capture.

US004,736,218 'Camera Support and Housing' - Combination of surveillance camera, pan and tilt mechanism, and spherical housing. Not applicable to mobile vehicle environment nor for patrol guard image capture.

US004,709,897 'Surveillance Camera Mount' - Unique and stationary camera mount. No pan and tilt mechanism and not applicable to mobile vehicle environment nor for patrol guard image capture.

US004,687,170 'Camera Mounting Bracket' - A housing and mechanism for lifting the cover for camera maintenance. No pan and tilt mechanism and not applicable to mobile vehicle environment nor for patrol guard image capture.

US004,618,886 'Surveillance Camera Mount' - Unique pan and tilt stationary camera mount. No pan and tilt mechanism and not applicable to mobile vehicle environment nor for patrol guard image capture.

US004,474,439 'Camera Support' - Multiple camera and support equipment mounting apparatus for motion picture and television film production trucks. No pan and tilt mechanism and not applicable to mobile vehicle environment nor for patrol guard image capture.

US004,310,136 'Backlash-Free Swivel and Tilt Mounting' - Complex mechanical pan and tilt backlash mechanism. Our invention is free of costly and additional mechanical components to overcome discernable image distortion from gear backlash or vibration. The field of view is electronically spatially corrected from accelerometer information that is applied in a control feedback loop.

US00D340,940S 'Combined Camera Mount and Camera Housing' - Unique design and not applicable to mobile vehicle environment nor for patrol guard image capture.

US00D295,628 'Electronic Control for Video Monitoring System' - Unique enclosure design and not applicable to mobile vehicle environment nor for patrol guard image capture.

US00D273,012 'Surveillance Camera Housing' - Unique design and not applicable to

mobile vehicle environment nor for patrol guard image capture.

A camera with a fixed field of view and focal length lens is mounted inside a police vehicle at the front windshield rear-view mirror looking forward. The camera signal is stored on VHS tape in real time (NTSC standard format). Brochure attached.

Summary of the Invention

The primary object of the invention is a Mobile Pan and Tilt Camera and a Display-Control apparatus for patrol security, safe vehicle operations, and hazard avoidance.

Another object of the invention is rugged design and construction for durable, reliable operation, and long life in rough environments.

Another object of the invention is a simple pan and tilt mechanism with fewer parts and lower costs to manufacturer.

A further object of the invention is a slip-clutch mechanism that is rugged and has few parts that enable low cost.

A further object of the invention is said mobile pan and tilt camera mounts at any angle and is not sensitive to gravity.

Yet another object of the invention is Electronic Image Stabilization overcomes

pan and tilt gear backlash pointing error during vibration and saves cost of additional mechanical components to do same function.

Still yet another object of the invention is said mobile pan and tilt camera mounts to typical automotive roof rack systems.

Another object of the invention is said mobile pan and tilt camera system mounts to typical automotive emergency lightbar systems.

Another object of the invention is said mobile pan and tilt camera system has mechanical and electrical 'quick and easy' disconnect mechanism for security and ease of installation.

A further object of the invention is said mobile pan and tilt camera mounts to various brackets for stationary applications.

Yet another object of the invention is said mobile pan and tilt camera incorporates near moisture free system for all weather conditions to avoid fogging of the optics and condensation forming on the camera electronics.

Still yet another object of the invention is Camera power supply heat sink stabilizes enclosure temperature and is made from laminated dissimilar metals and bends towards the metal enclosure as the camera cavity heats up and the bimetal primary heat sink touches the enclosure for significant additional heat sinking when the temperature is exceeding the operational set point.

Another object of the invention is said mobile display-control for patrol security, safe vehicle operations, and threat avoidance.

Another object of the invention is said mobile display-control has six degree of freedom mounting system for best individual viewing angle adjustment and can be operated with a single hand for easy and safe operation in a moving vehicle.

A further object of the invention is said mobile display-control incorporates control of pan and tilt, zoom, focus, autofocus, stabilization, and display brightness and can be operated with a single hand for easy and safe operation in a moving vehicle.

Yet another object of the invention is an Image Capture Box for storage of mobile images on various recording media and archives mobile patrol guard route and services.

Still yet another object of the invention is said image capture box's capacity for temporary mobile image storage and for radio frequency transmission of said mobile images to a data storage server for a consumer to access.

Other objects and advantages of the present invention will become apparent from the following descriptions, taken in connection with the accompanying drawings, wherein, by way of illustration and example, an embodiment of the present invention is disclosed.

A mobile pan and tilt camera and display-control apparatus comprising a fully rotatable camera mounted to a vehicle for capturing images, a display-control box having an image display screen and control buttons for controlling said camera and its movement attached to an adjustable mount in said vehicle within an operator's view and reach, an image capture box for storage on various recording media or for transmission of said captured mobile images, said captured mobile images are sent by radio frequency transmission to a data storage server for a consumer to access.

A process for viewing a scene with a mobile pan or tilt camera comprising the steps of: mounting a camera to a vehicle for capturing mobile images, displaying said images on an image display screen, controlling said camera position from within said vehicle, capturing said images in an image capture box for storage and transmission of said captured mobile images, transmitting said captured mobile images by radio frequency transmission to a data storage server for further processing, and providing said captured mobile images on internet server for official or consumer access.

The drawings constitute a part of this specification and include exemplary embodiments to the invention, which may be embodied in various forms. It is to be understood that in some instances various aspects of the invention may be shown exaggerated or enlarged to facilitate an understanding of the invention.

Brief Description of the Drawings

Figure 1 is a pictorial view of some of the elements of the invention.

Figure 2 is a perspective view of a mobile pan and tilt camera mounted to a Thule R brand roof rack.

Figure 3 is a two dimensional, multiple view of said mobile pan and tilt camera showing pan and tilt flexibility, form factor, and mechanical and electrical quick disconnect system.

Figure 4 is a pictorial view of an expanded set of elements of the invention.

Figure 5 is a functional block diagram of the image data server.

Figure 6 is a partial exploded view of the Thule ^R brand roof rack mounting hardware that mates with said mobile pan and tilt camera.

Figure 7 is a side view cutaway of the mechanical and electrical connect/disconnect mechanisms.

Figure 8 is a cross section of said mobile pan and tilt camera's camera housing showing thermal and moisture control systems.

Figure 9 is a multiple view drawing of a mobile display and control system.

Figure 10 is a multiple view drawing of pan and tilt invention.

Figure 11 is a functional diagram of pan and tilt mechanism, camera, field of view and field of regard diagram, and electronic backlash-free system.

Figure 12 is an alternate embodiment of said mobile pan and tilt camera mounted to said rack.

Figure 13 is a perspective view of said mobile pan and tilt camera mounted to a typical light bar assembly used on patrol security vehicles and emergency vehicles.

Figure 14 is an alternative mounting assembly for a Yakima ^R brand roof rack system. Figure 15 is a perspective view of a six degree of freedom adjustment mechanism for said mobile display and control system.

Figure 16 is a top view drawing of the clamp used in said six degree of freedom adjustment mechanism.

Figure 17 is an exploded view of the tilt assembly along with a cross-sectional view of the component interaction.

Figure 18 is an exploded view of the pan assembly along with a cross-sectional view of the component interaction.

Detailed Description of the Preferred Embodiments

Detailed descriptions of the preferred embodiment are provided herein. It is to be understood, however, that the present invention may be embodied in various forms. Therefore, specific details disclosed herein are not to be interpreted as limiting, but rather as a basis for the claims and as a representative basis for teaching one skilled in the art to employ the present invention in virtually any appropriately detailed system, structure or manner.

Figure 1 shows a mobile pan and tilt camera (20) that is attached to an electro-mechanical mount (mounting assembly) (22) and is interconnected electrically by a cable (29) to a display-control apparatus (21). Said display-control (21) is attached to an adjustable yoke (26) such that with a single hand, one can adjust the viewing angle of said display-control (21) by moving a yoke lever (25) from a lock position to an unlock position and back to said lock position. Said adjustable yoke (26) is attached to a goose neck (27) where the base of the gooseneck is supported by a bracket (28) that is bolted to a vehicle. Single hand movement of said display-control (21) of said adjustable yoke (26) and said gooseneck (27) enable vehicle operator to position said display to the best viewing angle. Imagery from said mobile pan and tilt camera (20) is displayed on said display and control (21) and can also to routed to additional equipment by an auxiliary video cable (24) connected to said display-control (21) at a spare connector (118). Both said mobile pan and tilt camera (20) and said display-control (21) are supplied electrical power from the vehicle by a power cable

(23).

Said mobile pan and tilt camera (20) is mounted to the top of a vehicle (50) achieving the the best open field of regard and viewing angles where electronic imagery can be captured, magnified and presented to the operator for improved vision. Mobile patrol guards can apply said mobile pan and tilt camera (20) and display-control (21) to improve their visual capabilities when performing their duties.

Figure 2 shows said mobile pan and tilt camera (20) comprised of a camera housing (32) attached from one side to a pan housing (33) that is coupled to a camera base (34). Said camera base (34) can be easily placed or removed from said mounting assembly (22). Said mounting assembly (22) incorporates a roof-rack specific mounting bracket (60) that securely attaches to a roof-rack support bar (52). Said roof-rack bar is supported by a roof-rack mount (51) that is fastened to a vehicle roof (50). Said camera housing (32) incorporates a threaded portal (31) that accepts a commercially available filter or protective optic element (30). From use of said mobile pan and tilt camera (20) in hostile environments, the said protective optic element (30) can be easily replaced by material available in common photography shops. Said mobile pan and tilt camera (20) locks to said mounting assembly (22) automatically from a ball-pin plunger assembly (36) engaging a reference hole (69) in said mounting assembly (22). A second locking and security fastener (35) is hand activated by turning said fastener (35) clockwise to secure and counterclockwise to release.

In figure 3 there are six views that show said mobile pan and tilt camera (20) and

its pan angle, tilt angle, and mounting features. Figure 3a is a side view of said mobile pan and tilt camera (20) at zero pitch angle reference. Figure 3b is a side view of said mobile pan and tilt camera (20) at +90 degree pitch angle. Figure 3c is a side view of said mobile pan and tilt camera (20) at -20 degree pitch angle. Figure 3d is a front view of said mobile pan and tilt camera (20) at zero pitch angle reference and shows said commercially available optic element (30). Figure 3e is a top view of said mobile pan and tilt camera (20) at zero pan angle reference. Also in figure 3e it can be seen that said camera housing (32) and said pan housing (33) can move clockwise 225 degrees and counterclockwise 135 degrees and from this rotational flexibility, enable said mobile pan and tilt camera (20) to view complete horizon or 360 degrees. Figure 3f is a bottom view of said mobile pan and tilt camera (20) that shows said ball-pin plunger assembly (36) location relative to said security fastener (35). Also in figure 3f is a slotted opening (38) on both sides of an electrical connector housing (39) that supports an electrical male signal connector (40) that provides the basis of engaging said mobile pan and tilt camera (20) to said mounting assembly (22) for safe and secure mechanical and electrical mating.

Figure 4 shows various operational configurations of the invention. The said mobile pan and tilt camera (20) can be electrically connected to either said display-control (21) by a signal cable (29) or to an image capture box (200) by said signal cable (29). Image display to the vehicle operator can be achieved with either above described configurations from said display-control (21). In the first case, the said mobile pan and tilt camera (20) is connected by said signal cable (29) to said display-control where images from said mobile pan and tilt camera (20) are shown on a

flat panel monitor (100). In the second case said mobile pan and tilt camera (20) is connected by said signal cable (29) to said image capture box (200) and a video signal cable (24) is connected to said display-control (21) where images from said mobile pan and tilt camera (20) are shown on a flat panel monitor (100). Pointing direction of said mobile pan and tilt camera (20) is accomplished from vehicle operator activation of a set of pan control buttons (102a & 102b) and a set of tilt control buttons (103a & 103b). Other camera controls and actions described below enable vehicle operator to achieve higher vision performance than capable from natural eyesight within the confines of said vehicle. Another configuration of the invention is connecting said video signal cable (24) to a video recorder (212) that is housed in a steel security box (210) from either said display-control (21) or said image capture box (200) where said steel security box can be padlocked at a security tang (211). Said security box (210) and said video recorder (212) enable said mobile pan and tilt camera (20) images to be archived. Still another configuration of the invention is connecting said video signal cable (24) to a laptop computer (220) through a PCMCIA Frame Grabber card (221) from either said display-control (21) or said image capture box (200) where said PCMCIA Frame Grabber card (221) digitizes video images from said mobile pan and tilt camera (20) and said laptop computer (220) can store the images internally, and/or display images, and/or transmit images by means of a PCMCIA modem card (222). The transmission of images from either said laptop computer (220) or said image capture box (200) can be accomplished on a network or by wireless means. Practical application of this invention by mobile patrol guards would be the configuration of said mobile pan and tilt camera (20) connected to said display-control (21) via said signal cable (29) for image presentation on said flat panel monitor (100) and video images are

routed to said image capture box (200) via said video signal cable (24) where some or all images selected by the operator are sent from said image capture box (200) by wireless means from an antenna (201) mounted on the patrol guard vehicle to an image vault (234) for official and customer review. Said image capture box (200) is comprised of a computer, a video frame grabber, a storage media like RAM and hard drive, and an RF modem.

Figure 5 is a functional block diagram of the practical implementation of distribution of images from said mobile pan and tilt camera (20). Video images (single frame picture, few picture frames, or full motion picture frames) are transmitted from said image capture box (200) and received by said image vault (234). Transmitted images are collected by wireless means at a receiving antenna (230) where the signal is filtered by a Radio Frequency Decoder (231), converted to a digital format and then transmitted by a modem (232) via land lines to said image vault (234). People that hire mobile patrol guards can now view images of their facilities by using a computer (237) attached to a like said modem (232) and connecting via a land line (233) and the internet to said image vault (234) where after validating inquiry credentials, customer facility images are transmitted from said image vault to said customer computer (237) and displayed. Additional, but not a complete list, of users of captured mobile images include a police officer (238) or a fire department official (239), or an internet world wide web subscriber (240) can access said image vault (234) via like said modems (232).

Figure 6 shows said mounting assembly (22) with the specific embodiment drawn to fit a Thule ^R brand roof rack bar (52). Said Thule ^R roof rack bar (52) has a

rubber coating (70) on the outside surface. Said mounting assembly (22) is comprised of a lower clamp (60) that closely conforms to form and size of said Thule R roof rack bar (52). Said lower clamp (60) incorporates ridges (72) that seat in said rubber coating (70) when a mounting plate (68) along with a weather seal plate (63) are secured with six screws (67) and provide a secure and tight adherence to said Thule R roof rack bar (52). On each side of said mounting plate (68) are slotted openings (71) that match said slotted openings (38) in said camera base (34). Said connector housing (64) incorporates an electrical female signal connector (65) that mates to said mobile pan and tilt camera (20) at said electrical male signal connector (40). At the end of said mounting plate (68) resides a threaded flange (66) that provides the means for securing said mobile pan and tilt camera (20) to said mounting assembly (22) from screwing said security screw (35) into said threaded flange. In said weather seal plate (63) is a locking hole (69) that accepts the end of said ball-pin plunger (36) from said mobile pan and tilt camera (20) as the safety mechanical locking mechanism to said mounting assembly (22). Said weather seal plate (63) utilizes a foam strip (62) at the outside edge to repel moisture and dirt when said mobile pan and tilt camera (20) is installed on said mounting assembly (22).

Figure 7 shows the installation action required to place said mobile pan and tilt camera (20) on said mounting assembly (22). Said mobile pan and tilt camera (20) is brought to said mounting assembly (22) and is offset by the pitch of said slotted teeth (38) such that they miss said slotted teeth (71) and said mounting plate (68) moves into cavity in said mobile pan and tilt camera (20). Said mobile pan and tilt camera (20) is then moved relative to said mounting assembly (22) to remove offset of said slotted

teeth (38 & 71). This last sliding action engages said electrical male signal connector (40) with said electrical female signal connector (65) and said ball-pin plunger (36) drops into said locking hole (69). From operator action, said security fastener (35) engages said threaded flange (66) to provide secondary mechanical engagement of said mobile pan and tilt camera (20) and said mounting assembly as well as security from vandals. Said mobile pan and tilt camera (20) is now ready for operation.

Inside said camera housing (32) is a camera cavity (88) where the temperature and humidity should be controlled to gain the best performance from a camera (150) and the optics. Figure 8 is a cross-section drawing noted as A-A in figure 3d. A temperature control system is comprised of a voltage regulator (81), a bi-metal heatsink (80), and said camera housing (32). Said voltage regulator (81) provides stable electrical power to said camera (150) and from this, generates heat as a byproduct. Said bimetal heatsink (80) provides a thermal path for heat from regulator to pass to the airspace of said camera cavity (88). From cold conditions in said camera cavity (88), said bimetal heatsink (80) is a distance from said camera housing (32). As said voltage regulator (81) and said camera cavity (88) rise in temperature, said bimetal heatsink (80) will begin to flex. The temperature set-point for said camera cavity (88) is determined by the size, weight, and type of metals combined to make said bimetal heatsink (80) where, at the optimal temperature set-point for said camera (150) and optics operation, said bimetal heatsink (80) flex's to engage said camera housing (32). Said camera housing (32) is aluminum or other thermally conductive material will provide a much greater capacity for conducting heat from said voltage regulator (81) and said camera cavity (88). When the temperature in said camera cavity (88) and

voltage regulator (81) begin to cool, said bimetal heatsink (80) relaxes and loses direct contact with said camera housing (32) enabling said bimetal heatsink (80) to increase in temperature and add heat to said camera cavity (88). Said camera cavity (88) is a water tight environment. Said commercially available optic element (30) is seated on a bezel o-ring (82) and said camera housing (32) is also seated on a o-ring fastened to a camera housing support (89). Said camera housing support (89) is mounted to a tilt shaft (84) that will allow said camera's (150) field of view translate vertically. Through said tilt shaft (84) pass signal wires to said camera (150) from said electrical male signal connector (40). A moisture control system for said camera cavity (88) is made up of a GoreTex R signal wire plug (85). Said GoreTex R signal wire plug (85) has an open center (87) to accept signal wires during fabrication of said mobile pan and tilt camera (20), a middle circular section made from GoreTex^R material designed to block water and pass vapor, and an outer ring for structure and support in mounting to said tilt shaft (84). One of the final steps in assembling said mobile pan and tilt camera (20) is to seal said open center (87) with silicon gel or like substance to provide moisture barrier at said open center (87). When said camera cavity (88) heats up from operation and becomes hotter than the outside ambient temperature, any water vapor in said camera cavity (88) will pass out and through said GoreTex R signal wire plug (85) leaving said camera cavity (88) with less water vapor. When said mobile pan and tilt camera (20) is shut off and said camera cavity (88) cools relative to ambient temperature, a reverse flow into said camera cavity (88) can occur, but water will be blocked at said GoreTex^R signal wire plug (85) and the relatively guick cool down period will allow only a minimum of water vapor to return to said camera cavity (88). This moisture control system effectively 'pumps down' the water vapor in said camera

cavity (88) each time the power is cycled for operation.

Images from said mobile pan and tilt camera (20) are presented to the vehicle operator at said display-control (21) from said flat panel monitor (100). Shown in figures 9a through 9d are design features of said display-control (21). Figure 9a shows a perspective view of said display-control (21) that would be positioned to the right of the steering wheel for US drivers and only the right hand is needed to control said camera (150) pointing, zoom, focus, and field of view stability, and said flat panel monitor (100) brightness. All above mentioned controls can be activated by the thumb while said display-control (21) is held by same thumb hand by the fingers in a finger grip cavity (120) and the palm against the right-outside edge of said display-control (21). Said display-control (21) is comprised of a power indication light emitting diode (104) that signifies that said display-control (21) has power, a tilt up button (102a), a tilt down button (102b), a pan right button (103a), a pan left button (103b), a zoom in button (105a), a zoom out button (105b), an autofocus on/off button (111), a manual focus near button (110), a manual focus far button (108), an autofocus on light emitting diode (109), a field of stability on/off button (106), a field of stability on/off light emitting diode (107), said flat panel monitor (100), a signal connector (117), a video signal connector (118), a power connector (119), a mounting support area (121), an adjustment access for pan control speed (112), an adjustment access for tilt control speed (113), an adjustment access for contrast (114) for said flat panel monitor (100), an adjustment access for color (115) for said flat panel monitor (100), an adjustment access for contrast (116) for said flat panel monitor (100), and a display-control housing (101). Pan and tilt pointing speed is determined by a method of touching said pan and tilt

buttons (102a, 102b, 103a, 103b) with single touch and hold for low speed or by quickly touching said pan and tilt buttons (102a, 102b, 103a, 103b) twice and holding (like 'double clicking' a computer mouse) for high pointing movement.

At the center of said mobile pan and tilt camera (20) invention is a pan & tilt mechanism (figure 10 a-c) that is simple, few parts, rugged, and reliable. Said pan and tilt mechanism (figure 10 a-c) is comprised of a main support (166), a tilt assembly (156), a pan assembly (161), a pan drive gear (164), a pan drive belt (165), a pan motor (162), a pan gear reduction (163), a tilt drive gear (158), a tilt drive belt (157), a tilt motor (160), and a tilt gear reduction (159). Both the pan assembly (161) and the tilt assembly (156) are bolted to said main support (166) and therefore maintain small angular misalignment error from each other. Said pan motor (162) and said pan gear reduction (163) and said pan drive gear (164) are mated and fastened to said main support (166) with said pan drive belt (165). Said pan drive belt (165) is put under proper tension by moving said pan gear reduction (163) about a pan adjustment hole (175). Said tilt motor (160) and said tilt gear reduction (159) and said tilt gear (158) are mated and fastened to said main support (166) with said tilt drive belt(157). Said tilt drive belt (157) is put under proper tension by moving said tilt gear reduction (159) in a tilt support slot (176). Said pan assembly (161) becomes integral to said mobile pan and tilt camera (20) by bolting to said camera base (34) from bottom. Signal wires from said electrical male signal connector (40) pass through center of said pan assembly (161) for motor control and pass through center of said tilt assembly (156) for said camera (150) operation.

Said pan & tilt mechanism (figure 10 a-c) does not have any additional parts to compensate for pointing errors and vibration due to backlash that is present in said pan drive gear (164), said tilt drive gear (158), said pan drive belt (165), said tilt drive belt (157), said pan gear reduction (162), said tilt gear reduction (159), said pan assembly (161), or said tilt assembly (156). Figure 11 demonstrates an inertial-electronic compensation for traditional gear backlash problems. Said camera (150, Sony - Model EVI330T) is comprised of a vertical sensing accelerometer (171) and a lateral sensing accelerometer (170). Said camera (150) is bolted to a camera cantilever support (155). Said camera cantilever support (155) is bolted to tilt assembly (156). Inside said camera (150) are image processing electronics that produce a video field of view (173) that is smaller than said camera's (150) total image sensor size which is a sensor field of regard (174). Under normal conditions, said video field of view (173) is centered in said sensor field of regard (174). Said video field of view (173) is the picture that is displayed on said display flat panel (100). Once vibration or wind forces are introduced to said mobile pan and tilt camera (20), pointing errors can occur from gear backlash movements. Said camera (150) measures said accelerometers (170 & 171) and computes real-time spatial shifts in image sensor pointing and compensates by electronically shifting said video field of view (175) to a different part of said image field of regard (174) that exactly offsets physical displacement due to vibration, wind forces, and gear backlash movements.

Figure 12 shows another embodiment of said mobile pan and tilt camera (20) where said camera housing (32) and the top part of said pan housing (33) are replaced with a translucent dome (260) that can act as a wind screen and when tinted, can

provide hidden pointing angles of said camera (150). Said mounting assembly (22) has an improved outside form that is aerodynamic for least noise and wind resistance.

Figure 13 shows another mounting application for emergency vehicles. Said mobile pan and tilt camera (20) is attached to a typical vehicle light rack (250) that traditionally is comprised of an emergency light(s) (252) and a siren (251). Said mounting assembly (22) is adapted to incorporate said lower clamp (60) with form and fit to match said typical vehicle light rack (250).

Figure 14 shows another commercially available roof rack system for said mounting assembly (22) and this specific embodiment fastens to a Yakima ^R brand roof rack bar (272). Said Yakima ^R roof rack bar (272) has a rubber coating on the outside surface. Said mounting assembly (22) is comprised of a lower clamp (270) that closely conforms to form and size of said Yakima ^R roof rack bar (272). Said lower clamp (270) incorporates a registration pin (274) that seats in mating holes in said Yakima ^R roof rack bar (272) when a mounting plate (68) along with a weather seal plate (63) are secured with six screws (67) and provide a secure and tight adherence to said Yakima ^R roof rack bar (272). Said registration pin (274) engages said Yakima ^R roof rack bar (272) and keeps said mobile pan and tilt camera (20) secure and without rotation to said Yakima ^R roof rack bar (272).

Figures 15 and 16 demonstrate the means by which said adjustable yoke (26) provide single hand adjustment of said display-control (21). A mounting bracket (134) is fastened to the back of said display-control (21) at said mounting support area (121).

At the top of said mounting bracket (134) is a display stop pin (135). Said adjustable yoke (26) is comprised of said yoke lever (25), a pair of locking jaws (131 and 132), an end ball (133), a limit travel screw (140), a yoke lever support bolt (138), and a yoke support nut (137). Said end ball (133) provides the means for flexible positioning of said locking jaws (131 and 132) relative to said gooseneck (27). Said yoke lever (25) is fastened to said locking jaws (131 and 132) by said yoke lever support bolt (138) and said yoke lever support nut (137). Said yoke lever (25) provides a non-concentric seating (130) for said yoke lever support bolt (138). Said non-concentric seating (130) provides a cam action where said locking jaws (131 and 132) come together from movement of said yoke lever (25). Said locking jaws (131 and 132) have a spherical cavity where said end ball (133) seats with loose tolerance. The face of said locking jaws (131 and 132) fit inside said display mounting bracket (134) by sliding face of said locking jaws (131 and 132) into the bottom of said display mounting bracket (134) until seated against said display stop pin (135) and then moving said yoke lever (25) such that faces of said locking jaws (131 and 132) separate inside said display mounting bracket (134) and hold tight said display-control (21) to said gooseneck (27).

Said tilt assembly (156) is shown in an exploded view in figure 17. Said tilt assembly (156) is a single side suspension and gimbal for said cantilever camera support (155), drive mechanism for tilting said camera (150), and functions as a slip clutch when a tilt body (168) is mechanically stopped by a tilt stop pin (167). Said tilt assembly (156) is comprised of a tilt slip adjustment ring (300), a tilt wave washer (301), a tilt gear (302), a tilt friction pad (303), a tilt body (168), a tilt bearing set (304), and a tilt support (305). Said tilt support is bolted to said main support (166). Said tilt bearing

(304) is placed on said tilt body (168) and held in place by a C-Clip (306). Another said C-Clip (306) is placed inside said tilt support (305) and said tilt body (168) is slid into said tilt support (305). Another set of said C-Clips (306) are placed inside said tilt support (305) and on said tilt body (168). The other said tilt bearing (304) is now placed inside said tilt support (305) and held in place by final set of said C-Clips (306) at said tilt support (305) and said tilt body (168). A tilt friction pad (303) is placed over said tilt body (168) followed by said tilt gear (302) followed by said tilt wave washer (301) and held by said tilt slip adjustment ring (300). Said tilt gear (302) is driven by said tilt belt drive (157) which in turn rotates said tilt body (168). Said tilt gear (302) is forced against said tilt friction pad (303) by said tilt wave washer (301). Amplitude of force is determined by the number of turns applied to said tilt adjustment ring (300). At the point said tilt body (168) comes in contact with said tilt stop pin (167), said tilt body (168) stops rotating. Said tilt gear (302) continues to rotate from said tilt motor (160) by overcoming friction between said tilt friction pad (303), said tilt body (168), and said tilt gear (302) and thereby keeping said tilt motor (160) from overheating or failing.

Said pan assembly (161) is shown in an exploded view in figure 18. Said pan assembly (161) is a single side suspension and gimbal for said main support (166), drive mechanism for panning said camera (150), and functions as a slip clutch when said main support (166) is mechanically stopped by a pan stop pin in said camera base (34). Said pan assembly (161) is comprised of a pan support (313), a pair of pan bearings (312), a pan body (311), a pan securing nut (310), a pan adjustment ring (314), a pan wave washer (315), a pan gear (316), and a pan friction pad (317). Said pan support (313) is bolted to said main support (166). The first said pan bearing (312)

is placed inside pan support (313). Said pan friction pad (317) is placed on said pan body (311) along with said pan gear (316) and said pan wave washer (315) and secured with said pan adjustment ring (314) screwed on said pan body (311) with enough force from said pan wave washer (315) pushing said pan gear (316) against said pan friction pad (317) and said pan body (311). Said pan body (311) is placed inside said pan support (313). Second said pan bearing (312) is placed inside said pan body (311). Said pan body (311) is secured to said pan support by said pan securing nut (310). Said pan gear (316) is driven by said pan belt drive (165) which in turn rotates said pan body (311). Said pan gear (316) is forced against said tilt friction pad (317) by said pan wave washer (315). Amplitude of force is determined by the number of turns applied to said pan adjustment ring (314). At the point said main support (166) comes in contact with a pan stop pin on said camera base (34), said pan support (313) stops rotating. Said pan gear (316) continues to rotate from said pan motor (162) by overcoming friction between said pan friction pad (317), said pan body (311), and said pan gear (316) and thereby keeping said pan motor (162) from overheating or failing.

While the invention has been described in connection with a preferred embodiment, it is not intended to limit the scope of the invention to the particular form set forth, but on the contrary, it is intended to cover such alternatives, modifications, and equivalents as may be included within the spirit and scope of the invention as defined by the appended claims.

CLAIMS

What is claimed is:

1. A mobile pan and tilt camera and display-control apparatus comprising: a fully rotatable camera mounted to a vehicle for capturing mobile images; a display-control box having an image display screen and control buttons for controlling said camera and its movement attached to an adjustable mount in said vehicle within an operator's view and reach;

an image capture box for receiving said captured images.

- A mobile pan and tilt camera and display-control apparatus as claimed in claim
 wherein said full rotation is achieved by mounting said camera to a tiltable mechanism mounted on a panning mechanism.
- A mobile pan and tilt camera and display-control apparatus as claimed in claim
 wherein said mount assembly incorporates a quick disconnect mechanism.
- 4. A mobile pan and tilt camera and display-control apparatus as claimed in claim 3 further comprising a double locking mechanism on said mount assembly where one mechanism is a security fastener.
- 5. A mobile pan and tilt camera and display-control apparatus as claimed in claim 2 further comprising a water seal attached to said mount.

- 6. A mobile pan and tilt camera and display-control apparatus as claimed in claim 2 wherein said mount assembly is adapted to engage the roof-rack of a vehicle.
- 7. A mobile pan and tilt camera and display-control apparatus as claimed in claim 2 wherein said mounting assembly is adapted to engage a Thule ^R brand roof rack system.
- 8. A mobile pan and tilt camera and display-control apparatus as claimed in claim 1 further comprising a ball-plunger for self-locking.
- A mobile pan and tilt camera and display-control apparatus as claimed in claim
 further comprising a security fastener as a secondary and operator activated
 mechanical locking mechanism.
- 10. A mobile pan and tilt camera and display-control apparatus as claimed in claim 2 further comprising a singular support for both pan and tilt mechanisms and separate drive gears and slip clutches for both pan and tilt mechanisms.
- 11. A mobile pan and tilt camera and display-control apparatus as claimed in claim 10 wherein said slip clutch comprises:
 - a rotationally free gear;
 - a support housing for gear;
 - a friction pad co-aligned to said gear;
 - a wave washer to apply a pressure against said rotationally free gear and

said gear housing of sufficient force to enable a motor to drive a transfer housing to a point where said support housing stops said transfer housing from rotation and said rotationally free gear breaks friction of said friction pad while said motor continues to drive without overheating.

- 12. A mobile pan and tilt camera and display-control apparatus as claimed in claim 1 further comprising a camera enclosure with bezel opening that is threaded to accept optical filters and is sealed with an o-ring for moisture blocking.
- 13. A mobile pan and tilt camera and display-control apparatus as claimed in claim 1 further comprising a Field of View (FOV) stabilized camera which provides an electronic compensation to overcome mechanical gear backlash and vibration.
- 14. A mobile pan and tilt camera and display-control apparatus as claimed in claim 1 wherein said camera may be mounted at any angle with respect to gravity.
- 15. A mobile pan and tilt camera and display-control apparatus as claimed in claim 1 further comprising a bimetal heat sink for camera power supply temperature control.
- 16. A mobile pan and tilt camera and display-control apparatus as claimed in claim 12 wherein said camera enclosure is adapted to act as an additional heat sink.
 - 17. A mobile pan and tilt camera and display-control apparatus as claimed in

claim 1 wherein said camera enclosure incorporates a one-way moisture passage plug with flexible and sealed passage for wires.

- 18. A mobile pan and tilt camera and display-control apparatus as claimed in claim 1 wherein said display and control system have a set of control buttons positioned to be operated with a single hand.
- 19. A mobile pan and tilt camera and display-control apparatus as claimed in claim 1 wherein said display and control system have a viewing angle adjustment lever positioned to be operated with said single hand.
- 20. A mobile pan and tilt camera and display-control apparatus as claimed in claim 1 further comprising an optically clear or tinted sphere enclosing said camera.
- 21 A mobile pan and tilt camera and display-control apparatus as claimed in claim 2 further comprising mounting mates to a Yakima ^R brand roof rack system.
- 22. A mobile pan and tilt camera and display-control apparatus as claimed in claim 2 further comprising said mount with an adapter plate to mate to a light bar used on emergency and patrol guard vehicles.
- 23. A mobile pan and tilt camera and display-control apparatus as claimed in claim 2 wherein said mount is adaptable to a rail road locomotive attachment.

- 24. A mobile pan and tilt camera and display-control apparatus as claimed in claim 2 further comprising said mount with adapter plate for ship-board attachment.
- 25. A process for viewing a scene with a mobile pan or tilt camera comprising the steps of:

mounting a camera to a vehicle for capturing mobile images;

displaying said images on an image display screen;

controlling said camera position from within said vehicle;


capturing said images in an image capture box for storage and transmission of said captured mobile images; and


transmitting said captured mobile images by radio frequency transmission to a data storage server for further processing; and


providing said captured mobile images on internet server for official or consumer access.


Abstract of the Disclosure


A mobile pan and tilt camera and display-control apparatus comprising a fully rotatable camera mounted to a vehicle for capturing images, a display-control box having an image display screen and control buttons for controlling said camera and its movement attached to an adjustable mount in said vehicle within an operator's view and reach, an image capture box for storage on various recording media or for transmission of said captured mobile images, said captured mobile images are sent by radio frequency transmission to a data storage server for a consumer to access. A preferred embodiment includes further comprising a mount that incorporates a quick disconnect mechanism along with a locking mechanical base and an electronic signal connector for easy camera installation and removal. A preferred embodiment includes further comprising a double locking mechanism where one mechanism is a security fastener.

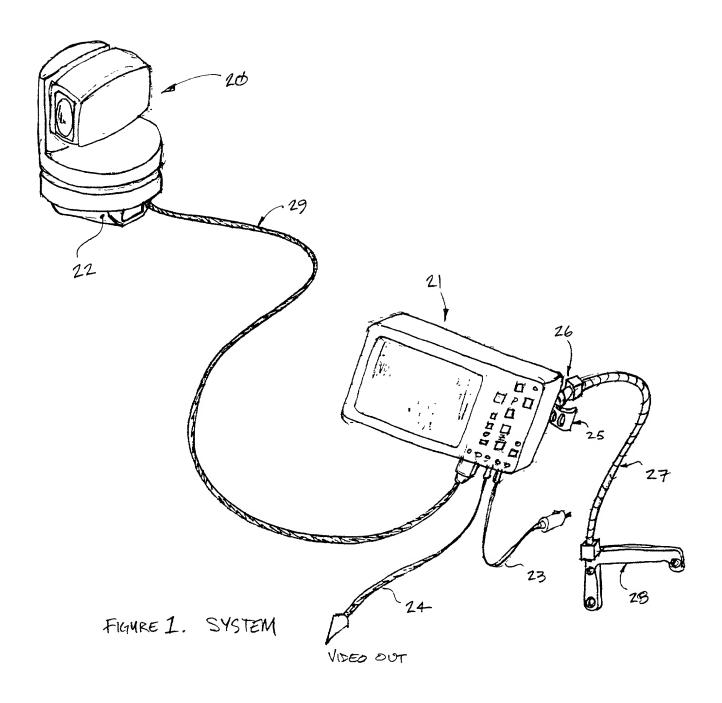


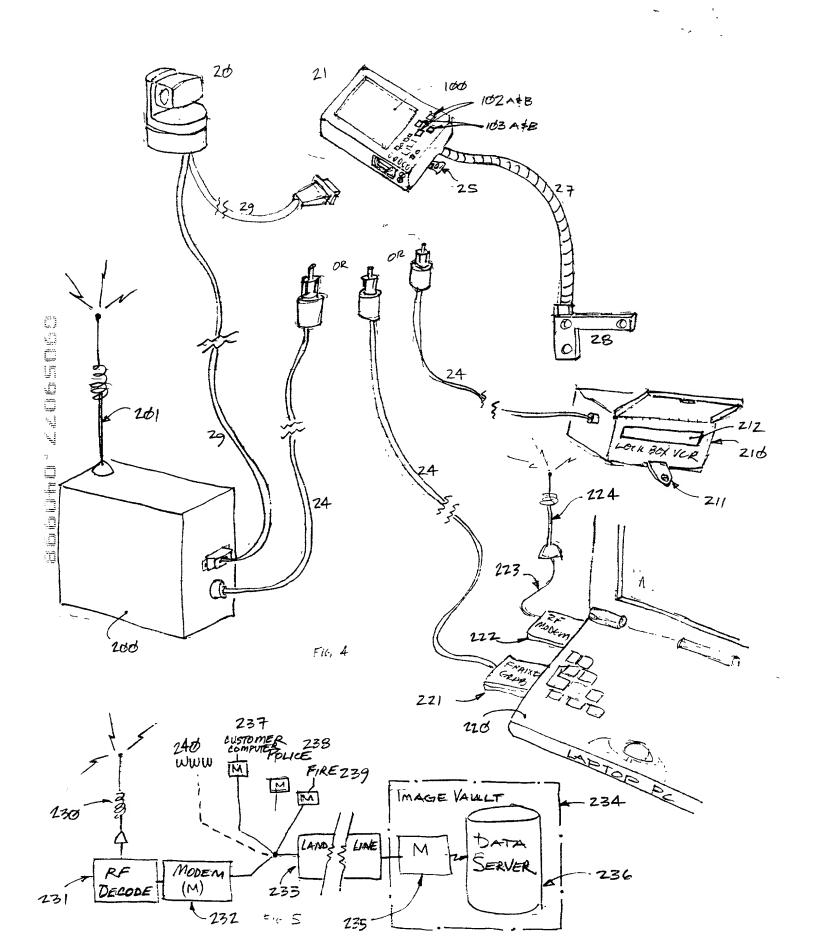


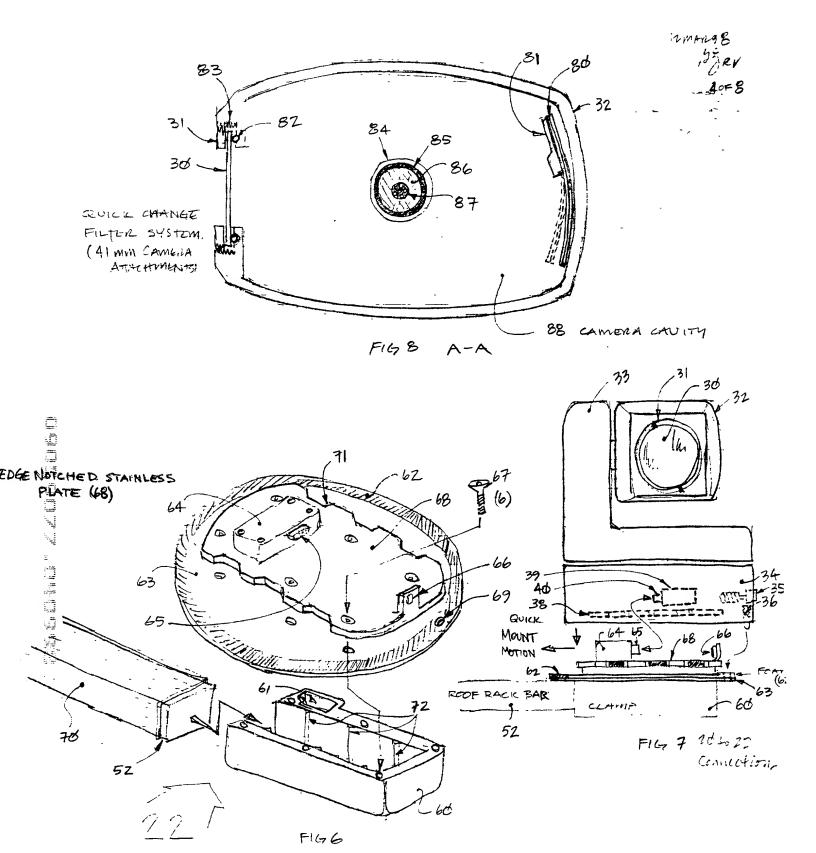

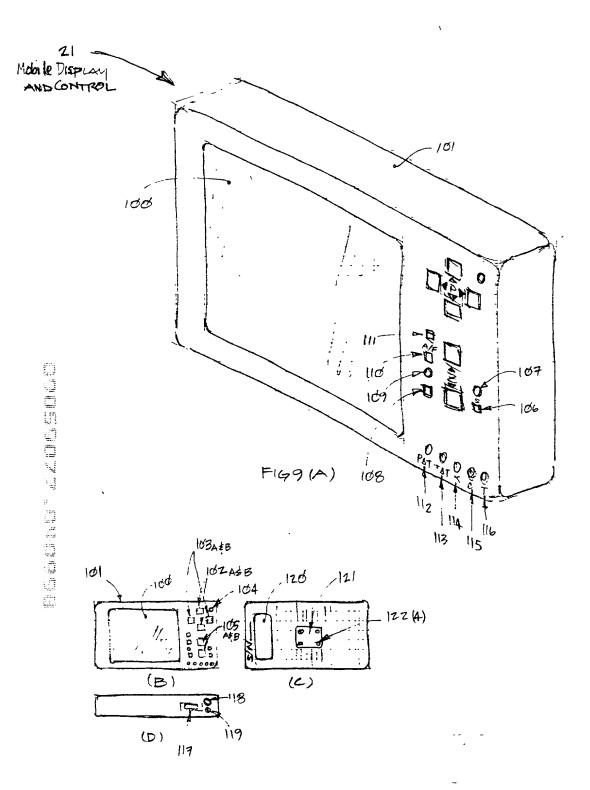

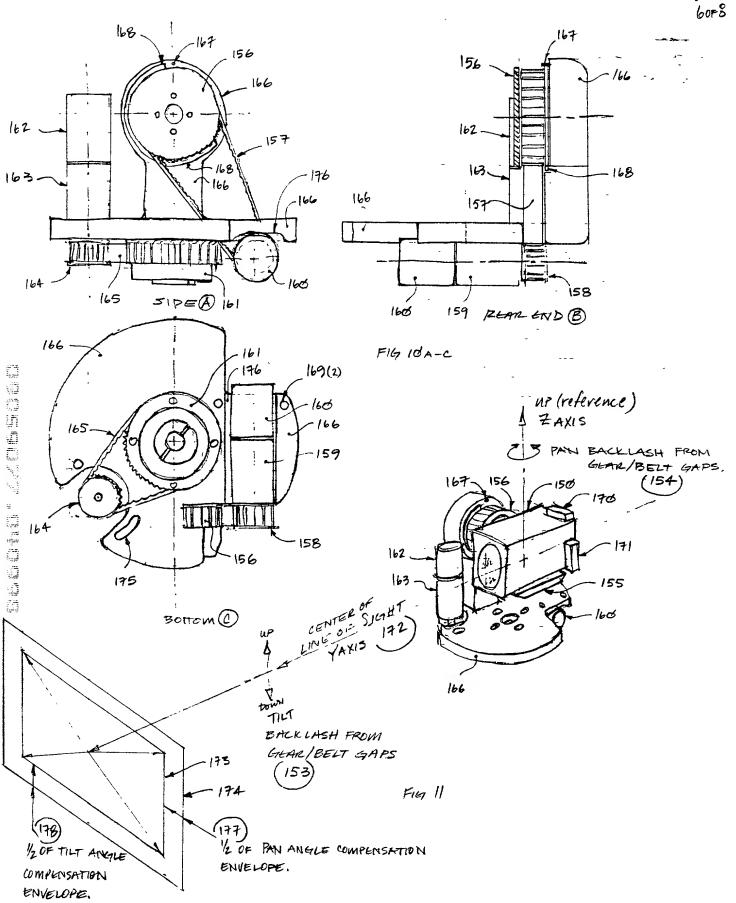

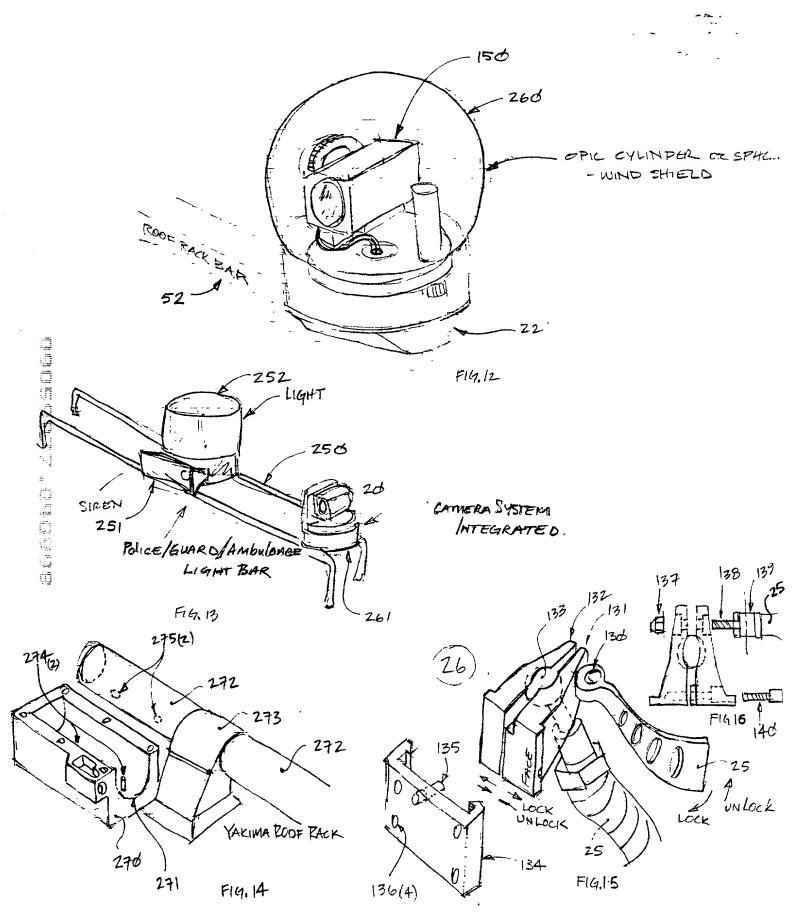

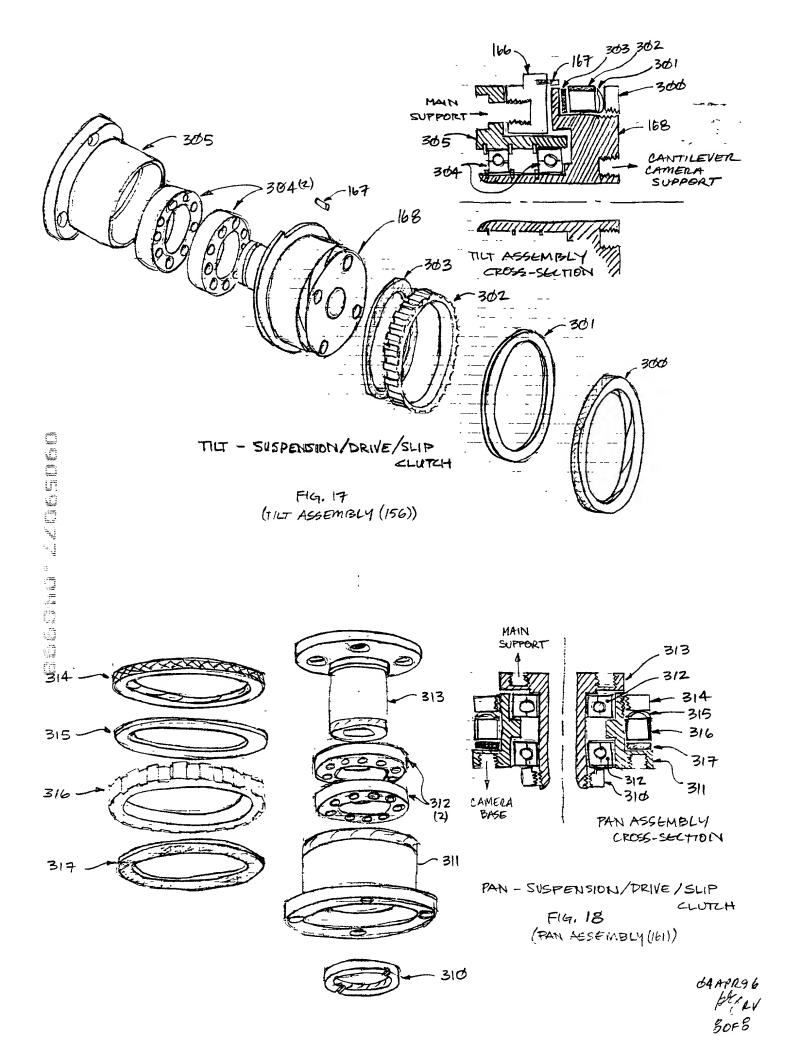



Someday all in-car video will be digital.

URES

Camera/Lens

- Color camera with auto-iris, auto-zoom, auto-focus
- $8x \ Zoom \ f = 5.9 \ to \ 47.2mm$
- fl.4 Wide macro Auto
- Minimum illumination 6 lux

Electronic shutter - 28 speeds (up to 1/1000 sec.) \hat{D} imensions – 49 \hat{x} 51 \hat{x} 100mm

Weight -210 g

System/Monitor

Programmable Touch
configuration:
Screen 1 – Record Fu
Screen 2 – Playback Programmable Touch Screen

Screen 1 - Record Functions

- Screen 3 Administrative
- Dimensions 4 5/8" x 2 1/2" x 4 1/8"
- Weight 12.07 oz.
- Adjustments Volume, Brightness, Color, Tint
- Recording/Playback Time -(T-120) 2-, 6- or 24-hours
- Power 12 Volts DC
- Video NTSC
- Horizontal resolution -240 lines (SP mode)
- Signal to Noise ratio 45db (SP mode)

DIGITAL IN-CAR

n-car video is the patrol officer's additional pair of eyes. Ours is computer controlled. So, unlike other systems, it's ready for the future. It interfaces with most radar and in-car communications equipment and registers a record of events on tape. The system is digitally secured against tampering and incorporates a "record inhibit" function. When a tape is inserted, it automatically fast forwards to the last recorded video, preserving all previous footage. The inconspicuous,



Wireless body mic/remote control unit operates system from up to 1500 feet away.

1053

ALMEN ZAZIEWZ

windshield mounted camera unit is about the size of a pack of cigarettes and the compact touch-screen monitor mounts anywhere that won't interfere with air bag deployment. The trunk recorder unit is encased in 14 gauge CRS steel to protect against fire, collision, climate, even bullets. The system can be activated remotely with a unit that doubles as a wireless microphone. Visual Patrol is the only in-car video that looks to the future.

Touch Screen Technology



Begin recording events with one touch.



Control lightbar and siren with a double tap of the screen.



System interfaces with most digital radar or laser speed devices



Visual Patrol provides a complete on-screen record of events.



Steel encased recorder and logic control center chassis.



Space efficient design.

FEATURE

Audio

- Up to 4 microphones are available for recording:
- A. Wireless mic
 (VHF transmitter and receiver)
- B. Internal mic on monitor/controls
- C. External rear mic for back seat recording
- D. Auxiliary

Wireless Mic System

- Frequency 170 to 216 Mhz
- Transmitter Power 9 Volt battery
- Receiver Power 12 volts DC 150mA
- Audio Output 600 Ohm unbalanced

Recorder Enclosure

- Dimension 11.5" x 5.75" x 14.5"
- 14 gauge CRS steel
- Steel base plate provided for mounting on either trunk ceiling or floor
- Security key lock
- Optional heating/ air conditioning



think then the		
-		
-		
Thurs the track		
-		
Free Hine		
1.11		

	Attorney Docket Number					
DECLARATION FOR	First Named Inventor	GREGORY E. JOHNSTON				
UTILITY OR DESIGN	COMPLETE IF KNOWN					
PATENT APPLICATION	Application Number					
	Filing Date					
Declaration OR Declaration Submitted Submitted after with Initial Filing Initial Filing	Group Art Unit					
	Examiner Name					
s a below named inventor, i hereby declare that:						

AN APPARATI	US AND ARDS.	Process For	CAPTURIN	G IMAGE	ES BY MOBILE				
		(Title of the Im	vention)						
the specification of which is attached hereto OR was filed on (MM/DD/	m [as Unite	ed States Applica	tion Number or PCT international				
Application Number			nded on (MM/DD/YYYY	` 	(# applicab				
I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 1.56.									
I hereby claim foreign priority benefits under Title 35, United States Code §119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or §365 (a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.									
Prior Foreign Application Country Foreign Filing Date (MM/DD/YYYY) Not Claimed					Certified Copy Attached? YES NO				
NONE				000000					
		listed on a supplemental pri							
I hereby claim the benefit und				sional application	i(s) listed below.				
Application Number(s)	Filing Date (MM/D	LHTYYY)	numbe supple	nal provisional application rs are listed on a mental priority sheet ad hereto.				



became avai	lable between	to disclose informent the filling date	of the pric	or applic	cation and	d the n	ational o	r PCT	internation	al filing di	ate of this	applic	cation.		
U.S. Pa		plication			Parent mber				nt Filing M/DD/YY			Par		atent Nu oplicab	
	Numbe	7		1401	, n. r.c (70411		·-/	1		<u></u>	<u>۱۱۰۵۷ تور</u>	
Λ¢	WE.														
		ļ													
		1													
		ļ													
<u> </u>		CT international													
		hereby appoint the onnected therewi		registe	ered praci	titioner	(s) to pro	secuti	e this applic	ation and	d to transa	ıct all 1	business	s in the Pa	tent
		Name		1	Registra		7			Name	•			Rec	gistration
			+	Numb	er									kumber	
٨	IONE														
Addition	Additional registered practitioner(s) named on a supplemental sheet attached hereto.														
Direct all co	rrespond	ence to:													
Name	GRE	EGORY G	E. J	OHN	570 h	٧									
Address		28 Mar		_	-										
Address															
City	SA	N JOSE						Sta	ite C.	A	_	Z	ZIP	9512	20
Country		s A			phone			38.997.8969 Fax 408.997.9521							
ha true: and	further the	statements mad it these statement	ts ware ma	ade will	h the kno	wiedaa	e that wil	liful fal:	ise statemei	nts and th	he like so	made	are pun	nishable b	y tine or
imprisonmen	nt, or both,	under Section 10 patent issued then	001 of Title	18 of 1	the Unite	d State	s Code	and th	nat such will	ful false	statement	ts may	y jeopan	dize the v	alidity of
		First Inventor					[petition ha	s been 1	filed for t	his ur	nsigned	inventor	· · · · · · · · · · · · · · · · · · ·
Given					Middle	E	Famil		<i>lohn</i>	5 7 E '	X /			Suffix	
Name	GRE	egory			inklai	<u>ح</u>	Name	<u>'</u>		-, 0				e.g. Jr.	
incom		Solm	th												6
inventor's Signature		12 Janu	"	~							1	ate	061	APR9	8
					_							\perp	7		-
Residence:	City	SAN JE	SE		State	CA	Country	y	USA				Citiz	enship	USA
Post Office	Address	1528	MON	ME	VAL	PL	4CE	-							
Post Office	Address														
City S	AN .	lose	State	CA	Zip	95	120		Country	us	A				
			ing ===						attached	<u>. </u>					
∐ Additi	ionai inv	entors are be	mig nam	an ou	supple	iiii (Hiji	iai SHO	ar(2)	anached	HELBIO	·				

PTO/SB/01 (8-96)
Please type a plus sign (+) Inside this box
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

	_			
ne		ΛО	AT	ION
UE		ΑП	AI.	IVIT

ADDITIONAL INVENTOR(S)

												Supp	рютю	ाखा ३)1 99 [
Name of	Addi	tions	ai Joint Inventor,	if any	r:	T] A De	itition has	be	en filed for	this unsi	gned	inventor	
Given Name		RIE			Middle Initial				amily iame			KRON			Suff	lx .ir.
Inventor's Signature			Um	/									Date	â	pril 1,1992	
Residence: City			WEST HILL	S	Si	tate	CA	co	ountry	USA	<u> </u>				Citizenship	USA
Post Office	Addre		7320 C		ะนร	·W	MY									
Post Office	Addre	88														
City W	EST	 r f;	HILLS	State	CA	Zip	91	30	37	Countr	ry	USA)			
Name of	Add	ition	ai Joint Inventor	, if an	<u>y:</u>		Γ^-		Ap	etition ha	s b	een filed fo	r this uns	igne	d inventor	
Given Name					Middle Initial	- 1			umily ame						Suff e.g.	
Inventor's Signature													Date	İ		
Residence: City	T					State		Cou	untry			•			Citizenship	
Post Office	Addres	15			<u>.</u>										-	
Post Office	Post Office Address															
City				State		Zip	p			Country	لــــّــــــــــــــــــــــــــــــــ					
Name o	f Add	litior	nal Joint Invento	r, If an	ý:		J		A	otition ha	ıs b	een filed fo	or this un	signe	d inventor	
Given Name						diddle nitial	1		amily ame						Suffix e.g.,	r
inventor's Signature													Date			<u> </u>
Residence: City						State		ca	ountry						Citizenship	
Post Office	Addre	**			-											
Post Office	Addre	58														~ .
City				State		Zip	·L		_	Count						
Name of	Add	Itlon	al Joint Inventor	, II an	у:			<u>C</u>	_	petition h	as l	been filed f	or this ur	nsigne		
Given Name					\Box	Midd Initia			amily Iame						Suffi e.g.	
Inventor's Signature							т						Date			
Residence: City						State		C	ountry						Citizenship	
Post Office	Addre	188										-				
Post Office	Addre	16.6														
City				State	l	Zip				Countr						
☐ Ad	dition	al in	ventors are being	g nam	ed on	sup	plem	enta	l shee	et(s) atta	che	ed hereto				

F	7TO/S8/01 (8-96)	
	OMB 0651-0032	
•	OF COMMEDCE	

Diaseo	hma	a pius sio	un /±	ingide	this box	
100350	IVDU	a DIUS SA	MI (T.		UIIS DOX	

	App	rovec	l for t	use thro	xugh 9/30/98.	OMB 0651-0032
Patent and	Tradema	rk Of	fice:	U.S. DE	PARTMENT	OF COMMERCE

Patent and Tracemark Unice: U.S. DEPARTMENT OF COMMERC Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

PRIORITY DATA (Supplemental Sheet)

Additional foreign applications:											
Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)		Priority Not Claimed	Certified Copy Attack YES N						
NONE				0000000000000000							
Additional provisional a	pplications:					''- '					
Applic	ation Number			Filing Date (MM/DD/YYYY)						
Additional U.S. application	ons:										
U.S. Parent Applicati Number		PCT Parent Number		iling Date D/YYYY)	Parent Patent Number (if applicable)						
NONE											

PT	D/SB	/01	(8-96)

Please type a plus sign (+) Inside this box					
	Diagea tuna	a nius sian	(+) inside	this box	\rightarrow

Approved for use through 9/30/98.	OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMEN	

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

REGISTERED PRACTITIONER INFORMATION (Supplemental Sheet)

		(Odphononia	
Name	Registration Number	Name	Registration Number
NONE			
		· · · · · · · · · · · · · · · · · · ·	



In The United States Patent and Trademark Office

HONORABLE COMMISSIONER OF PATENTS AND TRADEMARKS Washington, D.C. 20231

Dear Sir:

Information Disclosure Statement of An apparatus and process for capturing images by mobile security guards. by Gregory E. Johnston et al.

Pursuant to the guidelines for Information Disclosure Statements set forth in 37 C.F.R. Sections 1.97-1.99 and MPEP Section 609, Applicant(s) submit(s) herewith patents, publications or other information of which he/she/they is/are aware, which is believed to may be material to the examination of this application and in respect of which there may be a duty of disclosure in accordance with 37 CFR 1.56.

A list of patent(s) and/or publication(s) is set forth on the attached Form "Information Disclosure Statement by Applicant." A copy of each item listed is supplied herewith.

US005,671,932, 30SEP97, L.T.Chapman - A camera crane used in motion picture industry. A crane that supports a camera.

US005,526041, 11JUN96, T.L.Glatt - Rail based CCTV for surveillance similar to track lighting. Pan and tilt mechanism on rails.

US005,448,290, 03SEP95, A.J.VanZeeland - Remote control of several cameras from monitor that is a normal television. Camera on a cart with field-of-view adjustments.

US005,408,330, 18APR95, J.Squicciarini, H.Elruca(?) - Video incident capture system. Fixed field-of-view camera mounted inside police car.

US005,225,863, 06JUL93, I. Weir-Jones - Camera monunted on cable system with remote control and battery charger system. Camera on a cable.

US005,224,675, 06JUL93, J.C.Ellenberger, C.William, S.Arbuckle, W.F.Kuester III - Pan and tilt design for building with worm gear actuation. Pan and tilt mechanism for buildings.

US005,079,634, 07JAN92, M.Hosoro - Apparatus for wireless-controlling of a camera and two-directional control protocol. Camera control schema.

US005,012,335, 30APR91, A.Cobodar - Video cam-corder mounted to police car dashboard with automatic field-of-view adjustment. Video cam-corder in police car.

US004,937,675, 26JUN90, J.D.Starceski, R.E.Saul, J.Trosiek, J.J.Anderson, C.C.Moore - Remotely operable optical viewing apparatus with pan and tilt mechanisms with extreme position slip

clutch. Unique slip clutch invention.

US004,910,591, 20MAR90, E.Petrossian, A.A.Petrossian - Side and rear viewing apparatus for motor vehical. Camera in motor vehicle.

US004,736,218, 05APR88, A.Kutman - Combination of pan and tilt mechanisms for surveillance in dome housing. Pan and tilt mechanism for building.

US004,709,897, 01DEC87, P.C.Mooney - Surveillance camera mount. Surveillance camera.

US004,687,170, 18AUG87, R.C.Beaver - Camera mounting bracket with various fixed pointing positions. Surveillance camera mount.

US004,618,886, 21OCT86, P.C.Mooney - Surveillance camera with unique pan and tilt. Surveillance camera with pan and tilt for a building.

 $US004,\!474,\!439,\,02OCT84,\,G.W.Brown\ \ -\ Camera\ support\ apparatus\ to\ hold\ numerous\ camera\ attachments.\ Camera\ support\ apparatus.$

 $US004,\!310,\!136,\,12JAN82,\,P.C.Mooney\ \ \text{-}\ Backlash\text{-}free\ swivel\ and\ tilt\ mounting.}\ Backlash\text{-}free\ system.$

US00D340,940, 02NOV83, J.C.Ellenberger, W.S.Arbuckle, W.F.Kuester - Unique surveillance camera and mount. Surveillance camera.

US00D295,628, 10MAY88, P.C.Mooney - Electronic control for video monitoring system. Electronic control for video.

US00D273,012, 13MAR84, E.Kozioski - Surveillance camera housing. Surveillance camera.

Camera in a police car product, Skaggs Telecommunications Service, Inc., Murray, UT 800.486.1345, product brochure attached Fixed field of view, interior mounted camera and audio system for police car Camera in police car

While this Information Disclosure Statement may be "material" pursuant to 37 CFR 1.56, it is not intended to constitute an admission that any patent, publication or other information referred to therein is "prior art" for this invention unless specifically designated as such.

Respectfully submitted,

Gregory E. Johnston 1528 Monteval Place San Jose, CA 95120 PTO/SB/09 (10-96)
Approved for use through 10/31/99. OMB 0651-0031
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) & 1.27(b))—INDEPENDENT INVENTOR

Docket Number (Optional)

37 CFR 1.9(f) & 1.27(b))—INDEPEI	ADEM! IMAEM! ON		
Applicant or Patentee:	1 E. JOHTUSTON		
Application or Patent No.:			
Filed or Issued:			
Title: An Apparatus and P.			
As a below named inventor, I hereby de 1.9(c) for purposes of paying reduced for	eclare that I qualify as an in ees to the Patent and Trad	dependent invent emark Office desc	or as defined in 37 CFR cribed in:
the specification filed herewith v	vith title as listed above.		
the application identified above.			
the patent identified above.			
I have not assigned, granted, conveye grant, convey, or license, any rights in the under 37 CFR 1.9(c) if that person had business concern under 37 CFR 1.9(d)	ne invention to any person w I made the invention, or to I) or a nonprofit organization	any concern which nunder 37 CFR 1.	h would not qualify as a small 9(e).
Each person, concern, or organization obligation under contract or law to ass	to which I have assigned, ign, grant, convey, or licer	granted, conveyense any rights in th	ed, or licensed or am under an ne invention is listed below:
No such person, concern, or o			
Each such person, concern, c	or organization is listed bel	ow.	
Separate verified statements are required invention averring to their status as sr	nall entities. (3/CFH 1.2/)		
I acknowledge the duty to file, in this a entitlement to small entity status pric maintenance fee due after the date or	arto paving of at the time	e of Daving, the e	MILES OF THE ISSUE ISSUE OF WITH
I hereby declare that all statements mentormation and belief are believed to be willful false statements and the like so of Title 18 of the United States Code application, any patent issuing there	be true; and further that these made are punishable by fi and that such willful fals	ine or imprisonme e statements ma	int, or both, under section 1001 y jeopardize the validity of the
CARLORY & JOHNSTON NAME OF INVENTOR	ARIE LEVINKROD NAME OF INVENTOR	<u> </u>	NAME OF INVENTOR
Signature of inventor	Signature of inventor		Signature of inventor
06 APR98	April 7, 1998 Date		Date

United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division



Application deficiencies found during scanning:

 All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2"x 11". Pages	1.	-	plication papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 cause:
 □ Papers are not flexible, strong, smooth, non-shiny, durable, and white. □ Papers are not typewritten or mechanically printed in permanent ink on one side. □ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4"). □ Papers contain hand lettering. 2. Drawings are not in compliance and were not scanned because: □ The drawings or copy of drawings are not suitable for electronic reproduction. □ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". □ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). 3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction 			All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2"x 11".
 □ Papers are not flexible, strong, smooth, non-shiny, durable, and white. □ Papers are not typewritten or mechanically printed in permanent ink on one side. □ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4"). □ Papers contain hand lettering. 2. Drawings are not in compliance and were not scanned because: □ The drawings or copy of drawings are not suitable for electronic reproduction. □ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". □ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). 3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction 			Pages do not meet these requirements.
 □ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4"). □ Papers contain hand lettering. 2. Drawings are not in compliance and were not scanned because: □ The drawings or copy of drawings are not suitable for electronic reproduction. □ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". □ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). 3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction 			Papers are not flexible, strong, smooth, non-shiny, durable, and white.
 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4"). □ Papers contain hand lettering. 2. Drawings are not in compliance and were not scanned because: □ The drawings or copy of drawings are not suitable for electronic reproduction. □ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". □ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). 3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction 			Papers are not typewritten or mechanically printed in permanent ink on one side.
 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4"). □ Papers contain hand lettering. 2. Drawings are not in compliance and were not scanned because: □ The drawings or copy of drawings are not suitable for electronic reproduction. □ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". □ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). 3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction 			Papers contain improper margins. Each sheet must have a left margin of at least
 □ Papers contain hand lettering. 2. Drawings are not in compliance and were not scanned because: □ The drawings or copy of drawings are not suitable for electronic reproduction. □ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". □ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). 3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction 			2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
 Drawings are not in compliance and were not scanned because: ☐ The drawings or copy of drawings are not suitable for electronic reproduction. ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). Page(s)			
 ☑ The drawings or copy of drawings are not suitable for electronic reproduction. ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). 3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction 			•
 ☑ The drawings or copy of drawings are not suitable for electronic reproduction. ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). 3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction 	2.	Dra	wings are not in compliance and were not scanned because:
 □ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". □ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). 3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction 		Ø	The drawings or copy of drawings are not suitable for electronic reproduction.
 Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). Page(s) are not of sufficient clarity, contrast and quality for electron reproduction 		_	All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm)
at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8"). 3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction			
3. Page(s) are not of sufficient clarity, contrast and quality for electron reproduction			Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of
reproduction			at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
reproduction			
	3.	_	/ · /
4. Page(s) are missing.		rep	production
4. Page(s) are missing.		ъ	
	4.	Pag	ge(s) are missing.
5. OTHER	5	ОТ	THER.